

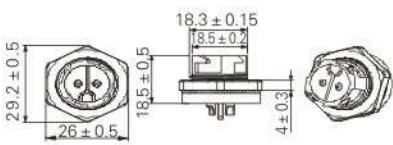
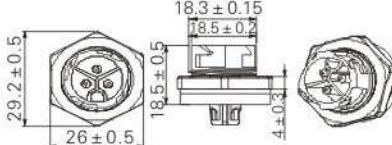




M19系列防水母接头  
M19 series waterproof female connector

| 描述<br>Description               | 注塑，螺纹，铆接式<br>Molded with Cable, Thread, Riveting                                    |                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| 照片<br>Photo                     |    |               |
| 尺寸<br>Drawing                   |    |               |
| 型号<br>Type                      | LY-832                                                                              | LY-396                                                                                          |
| 芯数<br>Contacts Numbers          | 2                                                                                   | 3                                                                                               |
| 额定电压<br>Voltage Rating          | 300V/600V                                                                           | 300V/600V                                                                                       |
| 额定电流<br>Current Rating          | 10A/13A/16A/20A                                                                     | 10A/13A/16A/20A                                                                                 |
| 适应线材<br>Fit wire                | ≤2.5mm <sup>2</sup> /≤12AWG                                                         | ≤2.5mm <sup>2</sup> /≤12AWG                                                                     |
| 可插拔次数<br>Mechanical Life        | 2000                                                                                | 2000                                                                                            |
| 工作温度<br>Operating Rating        | -40℃~105℃                                                                           |                                                                                                 |
| 防水等级<br>Waterproof Level        | IP67                                                                                |                                                                                                 |
| 获得认证<br>To obtain certification |  | <br>E476885 |
| 端子排列<br>Pin Layout              |                                                                                     |                                                                                                 |



M19系列防水公接头  
M19 series waterproof male connector

| 描述<br>Description               | 注塑，螺纹，铆接式<br>Molded with Cable, Thread, Riveting                                      |                                                                                                  |
|---------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| 照片<br>Photo                     |    |               |
| 尺寸<br>Drawing                   |    |               |
| 型号<br>Type                      | LY-829                                                                                | LY-811                                                                                           |
| 芯数<br>Contacts Numbers          | 2                                                                                     | 3                                                                                                |
| 额定电压<br>Voltage Rating          | 300V/600V                                                                             | 300V/600V                                                                                        |
| 额定电流<br>Current Rating          | 10A/15A/16A/20A                                                                       | 10A/15A/16A/20A                                                                                  |
| 适应线材<br>Fit wire                | ≤2.5mm <sup>2</sup> /≤12AWG                                                           | ≤2.5mm <sup>2</sup> /≤12AWG                                                                      |
| 可插拔次数<br>Mechanical Life        | 2000                                                                                  | 2000                                                                                             |
| 工作温度<br>Operating Rating        | -40℃~105℃                                                                             |                                                                                                  |
| 防水等级<br>Waterproof Level        | IP67                                                                                  |                                                                                                  |
| 获得认证<br>To obtain certification |  | <br>E476885 |
| 端子排列<br>Pin Layout              |                                                                                       |                                                                                                  |

M19系列防水公接头  
M19 series waterproof male connector
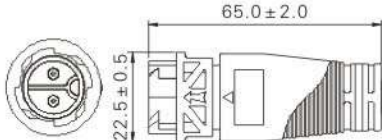
| 描述<br>Description               | 注塑，螺纹，铆接式<br>Molded with Cable,Thread,Riveting                                      |                                                                                      |
|---------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 照片<br>Photo                     |    |    |
| 尺寸<br>Drawing                   |    |    |
| 型号<br>Type                      | LY-831                                                                              | LY-397                                                                               |
| 芯数<br>Contacts Numbers          | 2                                                                                   | 3                                                                                    |
| 额定电压<br>Voltage Rating          | 300V/600V                                                                           | 300V/600V                                                                            |
| 额定电流<br>Current Rating          | 10A/13A/16A/20A                                                                     | 10A/13A/16A/20A                                                                      |
| 适应线材<br>Fit wire                | <=2.5mm2/<=12AWG                                                                    | <=2.5mm2/<=12AWG                                                                     |
| 可插拔次数<br>Mechanical Life        | 2000                                                                                | 2000                                                                                 |
| 工作温度<br>Operating Rating        | -40℃ ~ 105℃                                                                         |                                                                                      |
| 防水等级<br>Waterproof Level        | IP67                                                                                |                                                                                      |
| 获得认证<br>To obtain certification |  |  |
| 端子排列<br>Pin Layout              |                                                                                     |                                                                                      |

M19系列防水母接头  
M19 series waterproof female connector
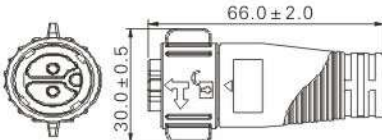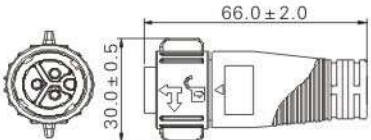
| 描述<br>Description               | 注塑，螺纹，铆接式<br>Molded with Cable,Thread,Riveting                                        |                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 照片<br>Photo                     |    |    |
| 尺寸<br>Drawing                   |    |    |
| 型号<br>Type                      | LY-828                                                                                | LY-382                                                                                |
| 芯数<br>Contacts Numbers          | 2                                                                                     | 3                                                                                     |
| 额定电压<br>Voltage Rating          | 300V/600V                                                                             | 300V/600V                                                                             |
| 额定电流<br>Current Rating          | 10A/13A/16A/20A                                                                       | 10A/13A/16A/20A                                                                       |
| 适应线材<br>Fit wire                | <=2.5mm2/<=12AWG                                                                      | <=2.5mm2/<=12AWG                                                                      |
| 可插拔次数<br>Mechanical Life        | 2000                                                                                  | 2000                                                                                  |
| 工作温度<br>Operating Rating        | -40℃ ~ 105℃                                                                           |                                                                                       |
| 防水等级<br>Waterproof Level        | IP67                                                                                  |                                                                                       |
| 获得认证<br>To obtain certification |  |  |
| 端子排列<br>Pin Layout              |                                                                                       |                                                                                       |